

OVX-6400

6400VA DC/AC INVERTER

GENERAL FEATURES:

- Sine wave output voltage
- Suitable for motors control
- Adjustable output frequency
- Adjustable output voltage
- Input voltage according to:
 - EN50163:2006
 - EN50124-2:2017
- High input-output isolation 5400Vrms
- Remote off opto-coupled
- Alarm by isolated relay contacts
- Configurable input: Reverse or Mid power
- Remote control via RS232
- CAN BUS
- Railway applications according to EN61287-1
- Fire and smoke: EN45545-2 pending



PRELIMINARY



	Input voltage	Output voltage	Output power
OVX-6400-7701	400 ...900 Vdc	400 V three phase	6 kW 6.4 kVA 8 kWpk



INPUT

Nominal DC input voltage	600/750Vdc
Minimum DC input voltage	400V
Maximum DC input voltage	900V continuous 2800Vdc according to EN50124-2=2017 4.2.2 and Annex A
Input voltage standard	EN50163 (Supply voltage of traction systems)
Inrush current	15A

OUTPUT

Output type	AC 3ph
Output Voltage	400V
Voltage tolerance	5±%
Output voltage range	20...100% of Vout (adjust via remote control)
Output frequency	50 / 60Hz via DIP-switch, 5...75Hz via RS-232
Maximum continuous current (Irms)	9.24A
Maximum peak current 5s (Irms)	11.5A
Continuous active / apparent power	6000W / 6400VA
Peak active / apparent power 5s	8000W / 8000VA
Load regulation	< 4.5%
Line regulation	< 2%
Output wave distortion THD	< 2% (average of 16 samples)
Output HF ripple	< 2.5%

ENVIRONMENTAL

Storage temperature	-25 ... 80°C
Operating ambient temperature:	
Full load	-25 ... 55°C, 70°C 10 min (SU3 class, according to EN61287-1)
62.5% load	-25 ... 70°C
Relative humidity without condensation	5 ... 95% with no condensation
Maximum Altitude	2000m at full load, 2500m at 95% of load
Cooling	Internal forced air controlled
Environmental regulations	RoHS & Reach according to directive 2011/65/EU
Shock and vibration	EN61373 pending

EMC

Immunity according	EN61000-6-2, EN50121-3-2
Emissions according	EN61000-6-4, EN50121-3-2

SAFETY

Safety according to	EN50124-1 Railway app. (Insulation coordination)
Dielectric strength: Input /output	5400Vac / 50Hz / 10s
Dielectric strength: Output / Earth	1500Vac / 50Hz / 1min
Dielectric strength: Input / Earth	5400Vac / 50Hz / 10s
Pollution degree	PD2
Overvoltage category	OV3
Fire and smoke	EN45545-2 pending

RELIABILITY

MTBF	>150.000h @40°C according to SN29500
Service life	20 years
Life cycle	20 years

MECHANICAL

Dimensions (H x W x D mm)	85,8 x 372 x 450,3
Weight	< 12000 g



Shock and Vibrations according to	EN61373 Category 1 class B body mounted
Protection degree	IP20

PROTECTIONS

Against overloads	Current and I ² T limited (see overload protection curve)
Against over-temperature	Shutdown with auto-recovery

CONTROL

Output OK LED	Green
Input OK LED	Green
Alarm LED	Red
Input alarm	Open when alarm. Maximum rating: 0.16A at 160Vdc
Output alarm	Open when alarm. Maximum rating: 0.16A at 160Vdc
Remote OFF input	Off applying 15...143 Vdc, Impedance >35k Ω
Configurable input (reverse or mid-power)	ON: applying 15...143 Vdc, Impedance >35k Ω


PRELIMINARY



ORDERING CODES


Model	Input voltage DC [V]	Input voltage range [V]	Max. Input current [A]	Output voltage AC [V]	Output current [A]	Active output power [W]	Appar. output power [VA]	Output peak current		Efficien. [%]	No load input current [A]
								5s (rms) [A]	(10pk) 10ms [A]		
ODX-6000-7502	24	16.8 - 30	232	400	6.50	3500	4500	7.8A	20	91.0	1.70
ODX-6000-7505	48	33.6 - 60	191	400	8.66	6000	6000	11.5	20	93.6	0.85
ODX-6000-7506	72	50.4 - 90	127	400	8.66	6000	6000	11.5	20	94.3	0.58
ODX-6000-7507	110	77 - 138	83	400	8.66	6000	6000	11.5	20	94.2	0.38

ODX-6000-75

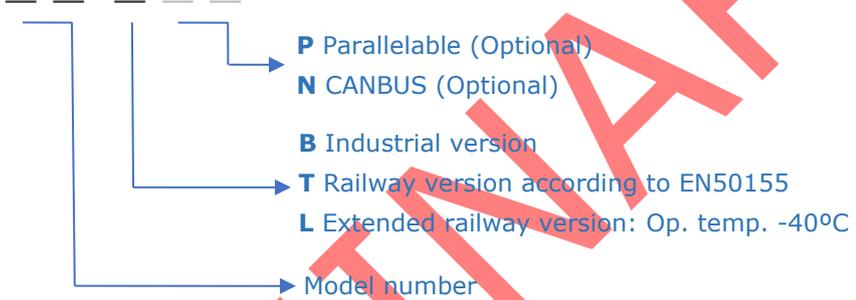


Accessories must be ordered in a separate order line
 The option P (parallelable) always has N (CANBUS)
 Please check availability for P or N options

BLOCKS DIAGRAM

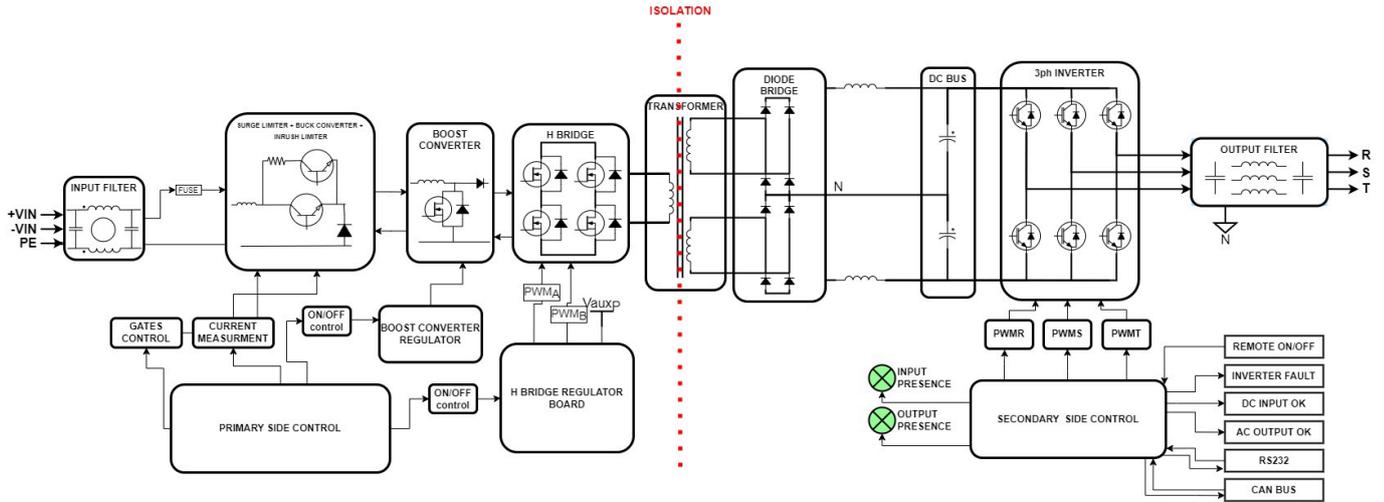

CONNECTIONS

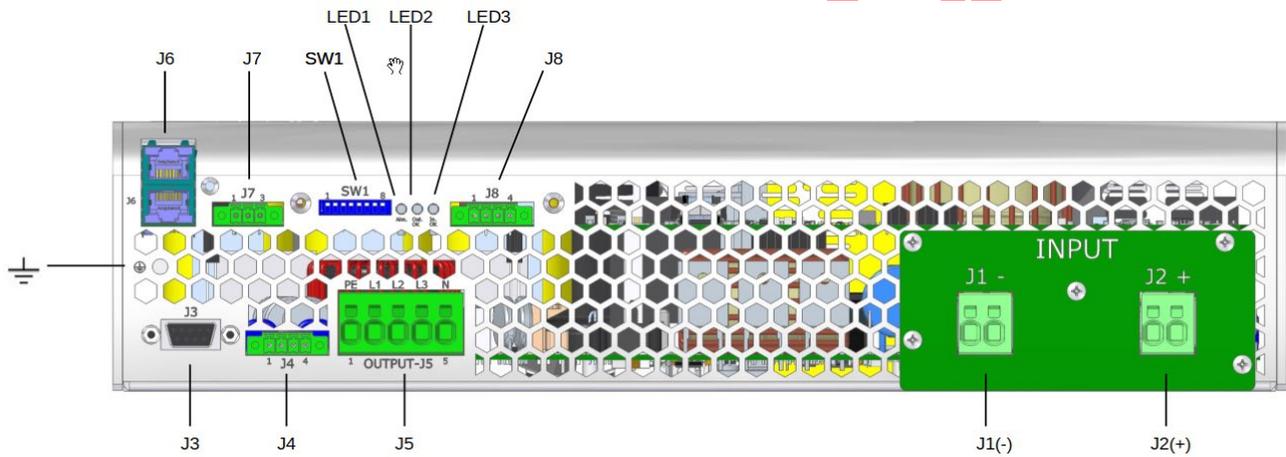

J1	-Vin	Spring clamp terminals cables 2.5 ... 4mm ²
J2	+Vin	
J5 - 1	Protective Earth	
J5 - 2	Output R	
J5 - 3	Output S	
J5 - 4	Output T	Phoenix Contact MC1.5/4-GF-3.81 Recommended female: Phoenix Contact MC1.5/4-STF-3.81
J5 - 5	Output Neutral	
J4 - 1	+ Configurable input	
J4 - 2	- Configurable input	
J4 - 3	+ Remote	Phoenix Contact MC1.5/4-GF-3.81 Recommended female: Phoenix Contact MC1.5/4-STF-3.81
J4 - 4	- Remote	
J8 - 1	Status output	
J8 - 2	Status output	
J7 - 1	CAN L (optional Can bus)	Phoenix Contact MC1.5/3-GF-3.81 Recommended female: Phoenix Contact MC1.5/3-STF-3.81
J7 - 2	CAN H (optional Can bus)	
J7 - 3	GND CAN	
J3	RS-232	Female D-Sub DB9
J6A -J6B	Optional Parallel operation	RJ45



PRELIMINARY

DESCRIPTION

The OVX-6400 is a three-phase sine-wave DC-AC inverter designed not only to work within 400 to 900V input voltage range but also to withstand surges and over-voltages as described in EN50124-2.

The unit allows:

- Changing the output frequency by means of DIP-switch-7 of SW1. OFF: 50Hz or default programmed, ON: 60Hz
- Change local/remote (waiting RS-232 commands) by means of DIP-switch-6 of SW1. OFF: local, ON: remote
- Shutdown applying voltage output 15 to 143V on pins 3 and 4 of J4
- Start-up motors by means of a soft start. In the start-up, the output voltage rises linearly from 0V to set voltage and the frequency from the initial to the set one. The start-up ramp slope may be changed via RS-232
- Set the rotation speed of a motor according to the appropriate Voltage/Frequency ratio.
- Configurable input (pin 1 and 2 of J4):
 - Reverse mode: Changing the rotation direction for the next start-up of a motor by applying voltage between 15 and 143V.
 - Mid power mode: Changing the output frequency in V/F mode from nominal to a mid-power frequency by applying voltage between 15 and 143V.
- Monitoring the status of the input and output voltage through the contacts of two separate solid state relays.
- Set and monitor parameters via RS-232, CAN BUS.

The OVX-6400 is equipped with a maximum average power protection as well as maximum output peak current protection. This protects the semiconductors even when an output short-circuit occurs. It also features a disable function for input under-voltage, which allows protecting the batteries from harmful discharges.

POWER DERATING vs AMBIENT TEMP.



START-UP

- The unit has 6 threaded holes for the fixation on a mounting surface.
- The unit has internal fans. For an appropriate cooling, the air input and output should be free of elements that cause and an air flow reduction (minimum recommended distance to other objects 90mm).
- Make connections as shown in the figure.
- The default output frequency is 50Hz. For 60Hz simply actuate the dip-switch as indicated in the figure.

For safety reasons, the following requirements must be met:

- Provide the equipment with some kind of protective enclosure that complies with the electrical safety directives in effect within the country where the equipment is installed.
- Include an input fuse with a rating immediately higher than the maximum input current.



RS232 communication port

It is possible to control and monitor de unit via RS232 by means of an application tool named PAM. This application is free and can be downloaded from the Premium web side

Also it is possible to control and monitor de unit directly using the protocol showed in table:


Protocol configuration: ASCII code, 57600 bauds, parity none, 8 bits, 1bit stop

Header	Function	Parameter	Returns	Explanation		
P	L	V	PTV####	Input voltage in Volts		
		v	PTv####	Input voltage ripple in Volts		
		Y	PTYRN=#### [13]YSN=#### [13]YTN=####	Output voltage in Volts RMS Phase-Neutral ([13] = char 13 of ASCII code)		
		I	PTIR=####[13]IS=#### [13]IT=####	Output current in Amps RMS ([13] = char 13 of ASCII code)		
		T	PTT####	Internal temperature1 in K		
		t	PTt####	Internal temperature 2 in K		
		F	PTF####	Nominal output frequency in Hz		
		f	PTf####	Actual output frequency in Hz		
		y	PTy####	Actual output voltage set-point in V		
		S	PTS####	Inverter state 999.9 → Enabled 000.0 → Disabled 222.2 → Blocked by overload 111.1 → Blocked by overload or shortcircuit		
		M	PTM####	Model number		
		R	PTR####	Firmware version		
		Other	PTE	Command not supported		
		R	G	1	####	OK / ERR Set the low input voltage timed shutdown in V
				2	####	OK / ERR Set the minimum alarm input voltage in V
	3			####	OK / ERR Change the status bit (after start up enabled with SW3 =LOCAL and disabled with SW3 =REMOTE) 999.9 → Inverter enabled 000.0 → Inverter disabled	
	4			####	OK / ERR Set the output voltage Phase-neutral in Vrms (Vo)(output must be stopped) 040.0 ≤ #### ≤ 230.0	
	5			####	OK / ERR Set the maximum output current in Arms 20% Inom ≤ #### ≤ 100% Inom	
	6			####	OK / ERR Set the nominal output frequency in Hz (Fo) (output must be stopped) 005.0 ≤ #### ≤ 075.0	
	7			####	OK / ERR Set the alarm maximum output current 0 < #### ≤ 100% Imax_warning	
	8			####	OK / ERR 111.1 → Reset the inverter	
	L			####	OK / ERR Set the minimum input starting voltage in Volts	
	O			####	OK / ERR Set the initial frequency in the startup (Fi) 005.0 ≤ #### ≤ 075.0	
	P			####	OK / ERR Set the ramp-up in increment of "N" cycles per Hz in mode V/F, frequency changes or start-up (Note-1) 001.0 ≤ #### ≤ 100.0	
	Q			####	OK / ERR Set the ramp-down in decrement of "N" cycles per Hz in mode V/F (Note-1) 002.0 ≤ #### ≤ 100.0	
	Y			####	OK / ERR Change the working mode of the input J4-1,J4-2 111.1 → Input as reverse phase control (default) 222.2 → Input as mid-power control (Note-2)	
	X			####	OK / ERR Set the mid-power frequency for V/F mode by the use of input J4-1,J4-2 005.0 ≤ #### ≤ 75.0	
	M			1	####	OK / ERR Set a new output frequency in Hz (output must be run and not stored in memory) 005.0 ≤ #### ≤ 075.0
				2	####	OK / ERR Set a new output voltage in Volts (output must be run and not stored in memory) 040.0 ≤ #### ≤ 230.0
				3	####	OK / ERR Set a new output frequency in Hz in mode V/F (output must be run and not stored in memory) 005.0 ≤ #### ≤ 075.0
		4	####	OK / ERR Changes the output phase order (output must be run and not stored in memory) 111.1 → Phase RST (direct phase) 222.2 → Phase SRT (reverse phase)		


OTHER PORTS PENDING



Note 1:

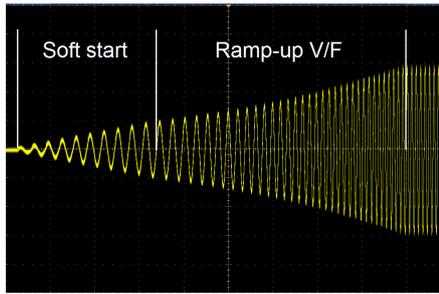


Example for N=1: start-up time = N x 1.7s for changes from 16Hz to 50Hz

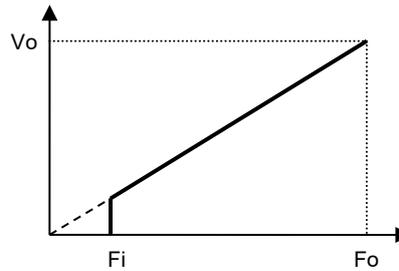

Mode V/F curve

Note 2 :

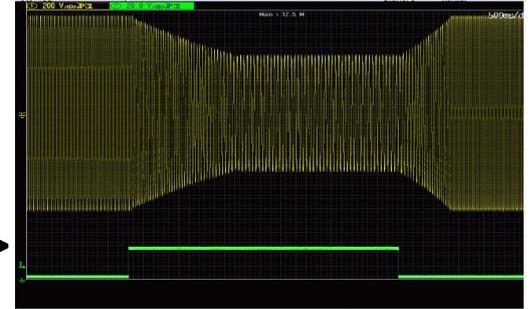

Example for change from 50Hz / 400V to 30Hz and 240V with ramp-down of 2 cycles /Hz and ramp-up of 1 Cycle/Hz. Yellow: output voltage and Green: Mid-Power input signal

WORKING PARAMETERS

Thermal protection		
Internal warning temperature (output alarm)	88	°C
Internal shutdown temperature	92	°C
Internal restart temperature	75	°C
Internal temperature of fan start-up	45	°C
Input voltage parameters		
750Vdc		
High input voltage instantaneous shutdown	1300>	Vdc
High input voltage timed shutdown (t)	1270 - 1080	Vdc
Time to shutdown (t)	Controlled via temperature measurement	
Start-up voltage	390	Vdc
Low input voltage instantaneous shutdown	370	Vdc
Time to shutdown (t)	500m	s
Output voltage parameters		
<u>Output voltage phase-neutral</u>	230	Vac
Output under-voltage shutdown	< 85% of setting 1000ms	
Warning voltage (output alarm)	< 90% of setting 200ms	
<u>Initial start-up frequency</u>	5	Hz
Soft start duration	1 cycles	
<u>Ramp-up V/F</u>	1 Hz/cycle	
Output current parameters		
<u>Maximum continuous output current</u>	9.24	A
<u>Warning current (output alarm)</u>	8.8	A
Maximum overload I ² t	See figure below	
Time between restart attempts	4000	ms
Number of attempts of consecutive overload	5	
Working failures and reset		
Lock for continuous overload or internal failure	Unlimited time	
Reset time by input disconnection	> 2	min



Configurable parameters underlined

OVERLOAD PROTECTION

Protection against overloads and short-circuits	By current limiting at Iopk By I²t . The unit shutdowns when the current-time is over the continuous operation curve	
Overload protection recovery	Every 4 seconds after shutdown, the unit tries to restart up to 5 times. If the overload persists, the unit remains shutdown until an input reconnection .	




DIMENSIONS

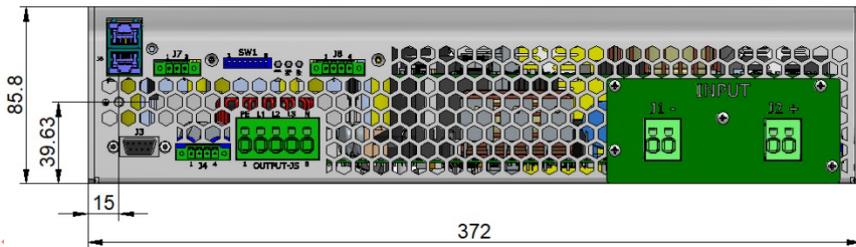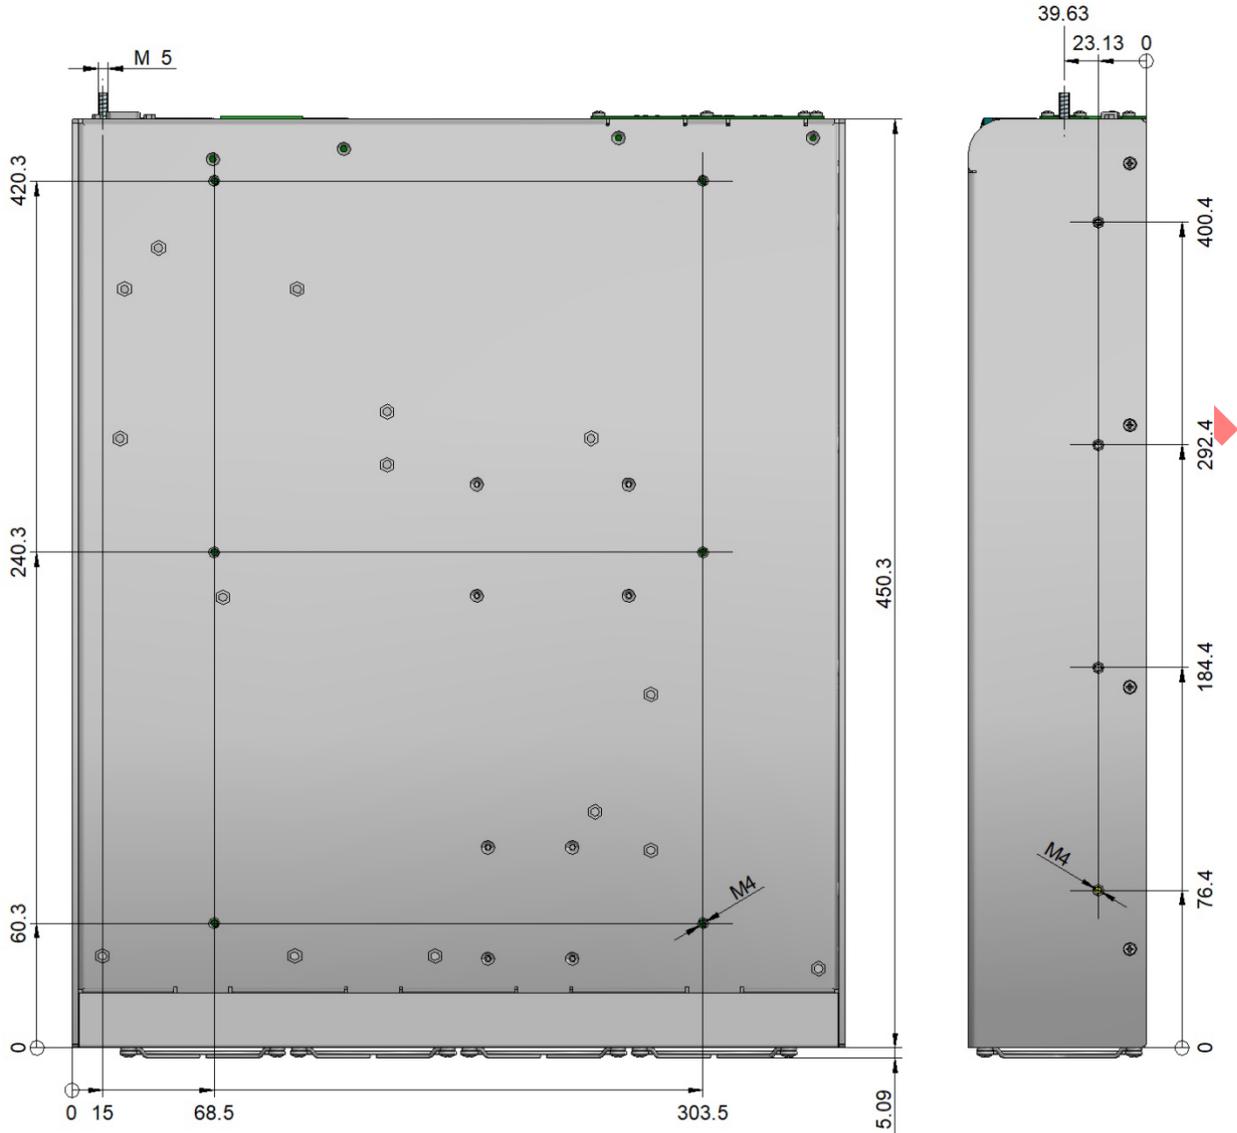



ACCESSORIES

Description	Notes	CODE
Mounting brackets kit	Contains two brackets and screws	9282

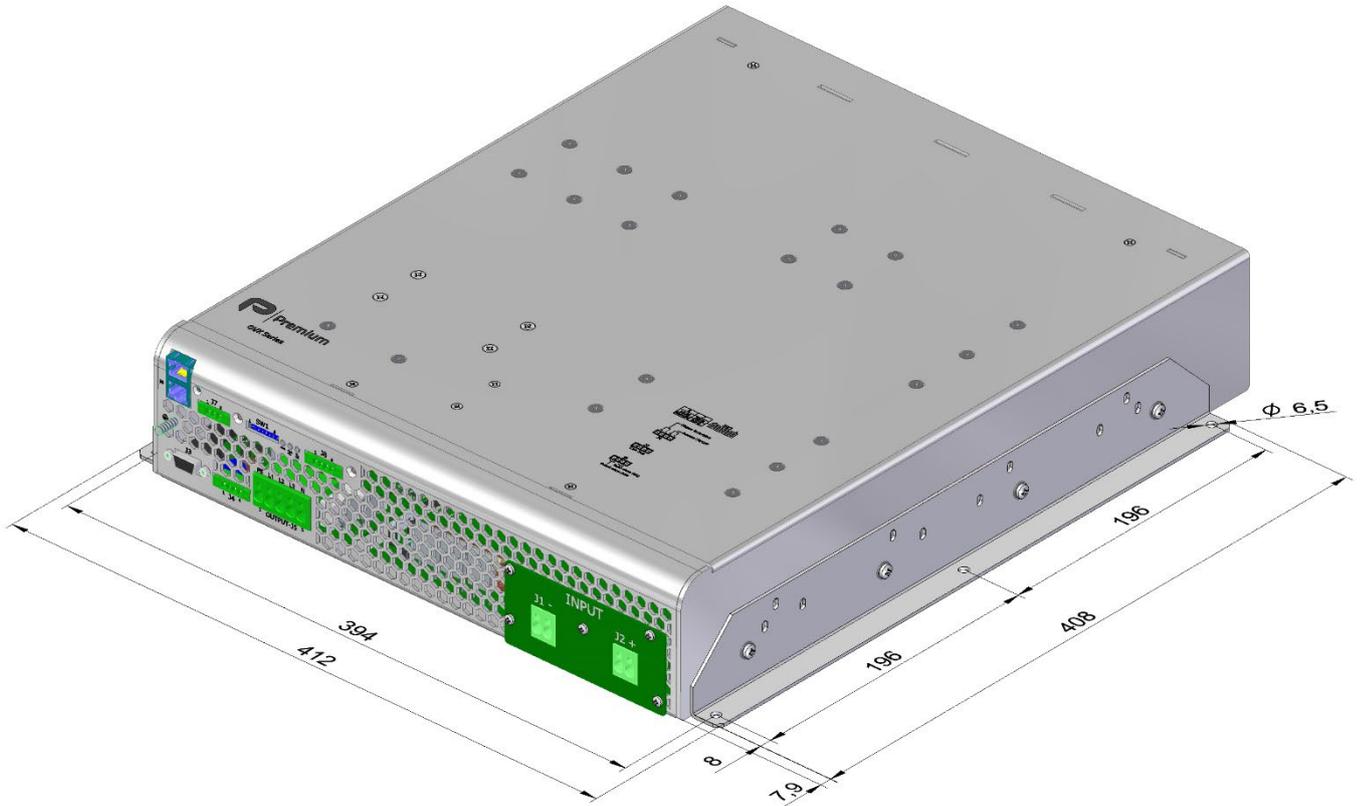

NP-9282

PRELIMINARY



EU, UKCA DECLARATION OF CONFORMITY

The undersigned, representing the following:

Manufacturer: PREMIUM, S. A.,
Address: C/ Dolors Aleu 19-21, 08908 L'Hospitalet de Llobregat, SPAIN

herewith declares that the product:

Type: DC/AC converter
Model: **OVX-6400**

is in conformity with the provisions of the following EU directive(s):

2014/35/EU SI 2016 No 1101	Low voltage / The electrical equipment (safety) regulations
2014/30/EU SI 2016 No 1091	EMC / Electromagnetic compatibility regulations
2015/863/EU SI 2012 No. 3032	RoHS / Restriction of the use of certain hazardous substances in electrical and electronic equipment

and that standards and/or technical specifications referenced below have been applied:

EN50124-1:2017	Railway app. (Insulation coordination)
EN 62368-1: 2014	Safety. Audio/video, information and communication technology equipment
EN 61000-6-3: 2007	Generic emission standard
EN 61000-6-2: 2005	Generic immunity standard
IEC 61287-1: 2015	Railway applications. Power converters installed on board rolling stock
EN 50121-3-2: 2016	Railway applications. EMC Rolling stock equipment

* Optional, See annexe

CE marking year: **2022**; UKCA marking year: **2022**

Notes:

For the fulfilment of this declaration the product must be used only for the aim that has been conceived, considering the limitations established in the instructions manual or datasheet.

L'Hospitalet de Llobregat, 10-02-2022

Albert Sole
Technical Director

PREMIUM S.A. is an ISO9001 and ISO14001
certified company by **Bureau Veritas**

ANNEXE

Applicable values for the different sections of the norm 61287-1: 2015																																																																
4.2.2	Working altitude	Up to 2000m																																																														
4.2.3	Ambient temperature	Class T3 inside vehicle compartment (-25 to 55°C full load) Class T3 Inside cubicle (55 to 70°C load <62.5%)																																																														
4.2.5	Shocks and vibrations	According EN61373:2010 Category 1 class B																																																														
4.5.3.19	EMC Electromagnetic Compatibility EN50121-3-2:2016 IEC62236-3-2:2018	<table border="1"> <thead> <tr> <th>Test</th> <th>Norm</th> <th>Port</th> <th>Frequency</th> <th>Limits</th> </tr> </thead> <tbody> <tr> <td rowspan="3">Radiated emissions</td> <td rowspan="3">IEC55016</td> <td rowspan="3">Case</td> <td>30MHz...230MHz</td> <td>40dB(µV/m) Qpk at 10m</td> </tr> <tr> <td>230MHz...1GHz</td> <td>47dB(µV/m) Qpk at 10m</td> </tr> <tr> <td>1...3GHz</td> <td>Do not apply</td> </tr> <tr> <td rowspan="3">Conducted emissions</td> <td rowspan="3">IEC55016</td> <td rowspan="3">Input</td> <td>3...6GHz</td> <td>Internal freq. < 108MHz</td> </tr> <tr> <td>150kHz...500kHz</td> <td>99dB(µV) Qpk</td> </tr> <tr> <td>500kHz...30MHz</td> <td>93dB(µV) Qpk</td> </tr> </tbody> </table>	Test	Norm	Port	Frequency	Limits	Radiated emissions	IEC55016	Case	30MHz...230MHz	40dB(µV/m) Qpk at 10m	230MHz...1GHz	47dB(µV/m) Qpk at 10m	1...3GHz	Do not apply	Conducted emissions	IEC55016	Input	3...6GHz	Internal freq. < 108MHz	150kHz...500kHz	99dB(µV) Qpk	500kHz...30MHz	93dB(µV) Qpk																																							
		Test	Norm	Port	Frequency	Limits																																																										
		Radiated emissions	IEC55016	Case	30MHz...230MHz	40dB(µV/m) Qpk at 10m																																																										
					230MHz...1GHz	47dB(µV/m) Qpk at 10m																																																										
					1...3GHz	Do not apply																																																										
		Conducted emissions	IEC55016	Input	3...6GHz	Internal freq. < 108MHz																																																										
					150kHz...500kHz	99dB(µV) Qpk																																																										
					500kHz...30MHz	93dB(µV) Qpk																																																										
		<table border="1"> <thead> <tr> <th>Test</th> <th>Norm</th> <th>Port</th> <th>Severity</th> <th>Conditions</th> <th>P</th> </tr> </thead> <tbody> <tr> <td>Electrostatic discharge</td> <td>IEC61000-4-2</td> <td>Case</td> <td>±8kV ±8kV</td> <td>Air (isolated parts) Contact (conductive parts)</td> <td>B</td> </tr> <tr> <td rowspan="4">Radiated high frequency</td> <td rowspan="4">IEC61000-4-3</td> <td rowspan="4">X/Y/Z Axis</td> <td>20V/m</td> <td>0.08...1.0GHz M. 80% 1kHz</td> <td rowspan="4">A</td> </tr> <tr> <td>10V/m</td> <td>1.4...2.1GHz M. 80% 1kHz</td> </tr> <tr> <td>5V/m</td> <td>2.1...2.5GHz M. 80% 1kHz</td> </tr> <tr> <td>3V/m</td> <td>5.1...6GHz M. 80% 1kHz</td> </tr> <tr> <td rowspan="4">Fast transients</td> <td rowspan="4">IEC61000-4-4</td> <td>Input</td> <td>±2kV</td> <td rowspan="4">Tr/Th: 5/50 ns</td> <td rowspan="4">A</td> </tr> <tr> <td>Output</td> <td>±2kV</td> </tr> <tr> <td>Signal</td> <td>±2kV</td> </tr> <tr> <td>PE</td> <td>±1kV</td> </tr> <tr> <td rowspan="2">Surge</td> <td rowspan="2">IEC61000-4-5</td> <td>Input L to L</td> <td>±1kV</td> <td rowspan="2">Tr/Th: 1.2/50µs</td> <td rowspan="2">B</td> </tr> <tr> <td>Input L to PE</td> <td>±2kV</td> </tr> <tr> <td rowspan="4">Conducted RF</td> <td rowspan="4">IEC61000-4-6</td> <td>Input</td> <td>10V</td> <td rowspan="4">0.15...80MHz M. 80% 1kHz</td> <td rowspan="4">A</td> </tr> <tr> <td>Output</td> <td>10V</td> </tr> <tr> <td>Signal</td> <td>10V</td> </tr> <tr> <td>PE</td> <td>10V</td> </tr> <tr> <td>Magnetic field</td> <td>IEC61000-4-8</td> <td>X/Y/Z Axis</td> <td>300A/m</td> <td>0Hz, 16.7Hz, 50/60Hz</td> <td>A</td> </tr> </tbody> </table>	Test	Norm	Port	Severity	Conditions	P	Electrostatic discharge	IEC61000-4-2	Case	±8kV ±8kV	Air (isolated parts) Contact (conductive parts)	B	Radiated high frequency	IEC61000-4-3	X/Y/Z Axis	20V/m	0.08...1.0GHz M. 80% 1kHz	A	10V/m	1.4...2.1GHz M. 80% 1kHz	5V/m	2.1...2.5GHz M. 80% 1kHz	3V/m	5.1...6GHz M. 80% 1kHz	Fast transients	IEC61000-4-4	Input	±2kV	Tr/Th: 5/50 ns	A	Output	±2kV	Signal	±2kV	PE	±1kV	Surge	IEC61000-4-5	Input L to L	±1kV	Tr/Th: 1.2/50µs	B	Input L to PE	±2kV	Conducted RF	IEC61000-4-6	Input	10V	0.15...80MHz M. 80% 1kHz	A	Output	10V	Signal	10V	PE	10V	Magnetic field	IEC61000-4-8	X/Y/Z Axis	300A/m	0Hz, 16.7Hz, 50/60Hz	A
		Test	Norm	Port	Severity	Conditions	P																																																									
		Electrostatic discharge	IEC61000-4-2	Case	±8kV ±8kV	Air (isolated parts) Contact (conductive parts)	B																																																									
		Radiated high frequency	IEC61000-4-3	X/Y/Z Axis	20V/m	0.08...1.0GHz M. 80% 1kHz	A																																																									
					10V/m	1.4...2.1GHz M. 80% 1kHz																																																										
					5V/m	2.1...2.5GHz M. 80% 1kHz																																																										
					3V/m	5.1...6GHz M. 80% 1kHz																																																										
Fast transients	IEC61000-4-4	Input	±2kV	Tr/Th: 5/50 ns	A																																																											
		Output	±2kV																																																													
		Signal	±2kV																																																													
		PE	±1kV																																																													
Surge	IEC61000-4-5	Input L to L	±1kV	Tr/Th: 1.2/50µs	B																																																											
		Input L to PE	±2kV																																																													
Conducted RF	IEC61000-4-6	Input	10V	0.15...80MHz M. 80% 1kHz	A																																																											
		Output	10V																																																													
		Signal	10V																																																													
		PE	10V																																																													
Magnetic field	IEC61000-4-8	X/Y/Z Axis	300A/m	0Hz, 16.7Hz, 50/60Hz	A																																																											
<p>P= Performance criteria, L= Line, PE= Protective Earth</p>																																																																
4.5.2.3	Tests list	<ol style="list-style-type: none"> 1 Visual Inspection 2 Verification of size and tolerance 3 Weight 4 Marking inspection 5 Functional test on refrigeration system 6 Sealing test 7 Grade protection test 8 Dielectric strength test 9 Resistance to isolation test 10 Test for mechanical and electrical protection and for the measurement equipment 11 Low load test 12 Switching test 13 Measurement of acoustic noise 14 Heating test 15 Power loss test 16 Power overvoltage test and energy transients 17 Fast changes in load test 18 Inspection of safety requirements 19 Shock and vibration test 20 EMC test 21 Step in power line test 22 Interruption of voltage supply test 23 Current Sharing 	<p>Routine Type Type Routine Type N/A N/A Routine Type N/A Type Routine Routine Type Type Type Type Type Type Type Type Type Type</p>																																																													

