

### ■ Main Features

- )] High efficiency and compact size
- )] Plastic enclosure, circuit breaker shape
- )] Simplified wiring (no PE connection)
- )] Overload 150%
- )] High operating temperature with no derating

**TECHNICAL DATA**


Model type	NPSM80-12	NPSM80-24
<b>OUTPUT DATA</b>		
Rated voltage	12...15Vdc	24Vdc
Adj. output voltage range	12...15Vdc	23...28Vdc
Continuous current	6.0...5.0A	3.3A
Overload limit	7.5A @ 12Vdc 6.5A @ 15Vdc	4.0A
Short circuit peak current	20A	25A
Load regulation	≤ 0.5%	≤ 1%
Ripple & Noise <sup>1</sup>	≤ 100mVpp	≤ 50mVpp
Hold up time Vin = 120Vac Vin = 240Vac		≥ 10ms ≥ 30ms
Protections	<ul style="list-style-type: none"> <li>▪ Overload/short circuit: Hiccup mode</li> <li>▪ Thermal protection</li> <li>▪ Output overvoltage</li> </ul>	
Status Signals	<ul style="list-style-type: none"> <li>▪ <b>DC OK</b> - green LED</li> </ul>	
Parallel connection	Possible for redundancy (with external ORing module)	
<b>INPUT DATA</b>		
Input AC rated voltage Frequency	Nominal: 120...240Vac (UL certified) Range: 90...264Vac 47...63Hz	
Input DC rated voltage	110...345Vdc	
Input AC rated current Vin = 120Vac Vin = 240Vac	1.50A 0.85A	1.40A 0.85A
Input DC rated current Vin = 110Vdc Vin = 345Vdc	1.0A 0.40A	
Inrush peak current	≤ 85A	
Touch (leakage) current	≤ 0.25mA	
Internal protection fuse	Fuse 2AT (not user replaceable)	
Recommended external protection	MCB 6A C curve It is strongly recommended to provide external surge arresters (SPD) according to local regulations.	
<b>GENERAL DATA</b>		
Efficiency <sup>3</sup>	> 86%	> 87%
Dissipated power	< 12.5W	< 12W
Operating temperature <sup>2</sup>	- 40°C...+ 70°C UL certified up to 50°C for NPSM80-12 and up to 55°C for NPSM80-24	
Derating	- 1.2W/°C over 50°C	- 0.9W/°C over 55°C
Storage temperature	- 40°C...+ 80°C	
Humidity	5...95% r.H. non condensing	
Life time expectation	51'136h (5.8 years) at 25°C ambient full load	
MTBF	<ul style="list-style-type: none"> <li>▪ MIL-HDBK-217F &gt; 500'000h at 25°C ambient full load</li> </ul>	
Overvoltage category	<ul style="list-style-type: none"> <li>▪ EN50178 III</li> </ul>	
Pollution degree	<ul style="list-style-type: none"> <li>▪ IEC60664-1 2</li> </ul>	
Protection Class	<ul style="list-style-type: none"> <li>▪ CLASS II</li> </ul>	
Input / output isolation	4.2kVdc	
Safety Standards	<ul style="list-style-type: none"> <li>▪ UL508 (certified E356563)</li> <li>▪ EN60950 (reference)</li> <li>▪ EN50178 (reference)</li> </ul>	
EMC Emission	<ul style="list-style-type: none"> <li>▪ EN55011 (CISPR11) Class A</li> <li>▪ EN55022 (CISPR22) Class A</li> </ul>	
EMC Immunity	<ul style="list-style-type: none"> <li>▪ EN61000-4-2 Level 3</li> <li>▪ EN61000-4-3 Level 3</li> <li>▪ EN61000-4-4 Level 3</li> <li>▪ EN61000-4-5 Level 3</li> <li>▪ EN61000-4-11 Level 2</li> </ul>	
Protection degree	<ul style="list-style-type: none"> <li>▪ EN60529 IP20</li> </ul>	
Vibration sinusoidal	<ul style="list-style-type: none"> <li>▪ IEC 60068-2-6 (5-17.8Hz: ±1.6mm; 17.8-500Hz: 2g 2hours / axis (X,Y,Z)</li> </ul>	
Shock	<ul style="list-style-type: none"> <li>▪ IEC 60068-2-27 (30g 6ms, 20g 11ms; 3 bumps / direction, 18 bumps total)</li> </ul>	
Connection terminals	2.5mm <sup>2</sup> , screw type header (24...12AWG)	
Case material	Plastic, Flame retardant UL94 V-0	
Weight	0.23kg	
Size (W x H x D)	72.0 x 90.0 x 61.5mm	

1) Ripple and Noise are measured with 20MHz bandwidth, probe terminated with a 0.1µF MKP parallel capacitor.  
 2) Start-up type tested: - 40°C, possible at nominal voltage with load deration.  
 3) For NPSM80-12 measures are performed with output set to 15Vdc.



**Notes:**

- Technical parameters are typical, measured in laboratory environment at 25°C and 240Vac / 50Hz, at nominal values, after minimum 5 minutes of operation.  
 - Power rating, losses, efficiency, ripple, thermal behaviour and start-up may change outside of the nominal rated input range. Contact factory for details.  
 - Data may change without prior notice in order to improve the product.

**DIMENSIONS**

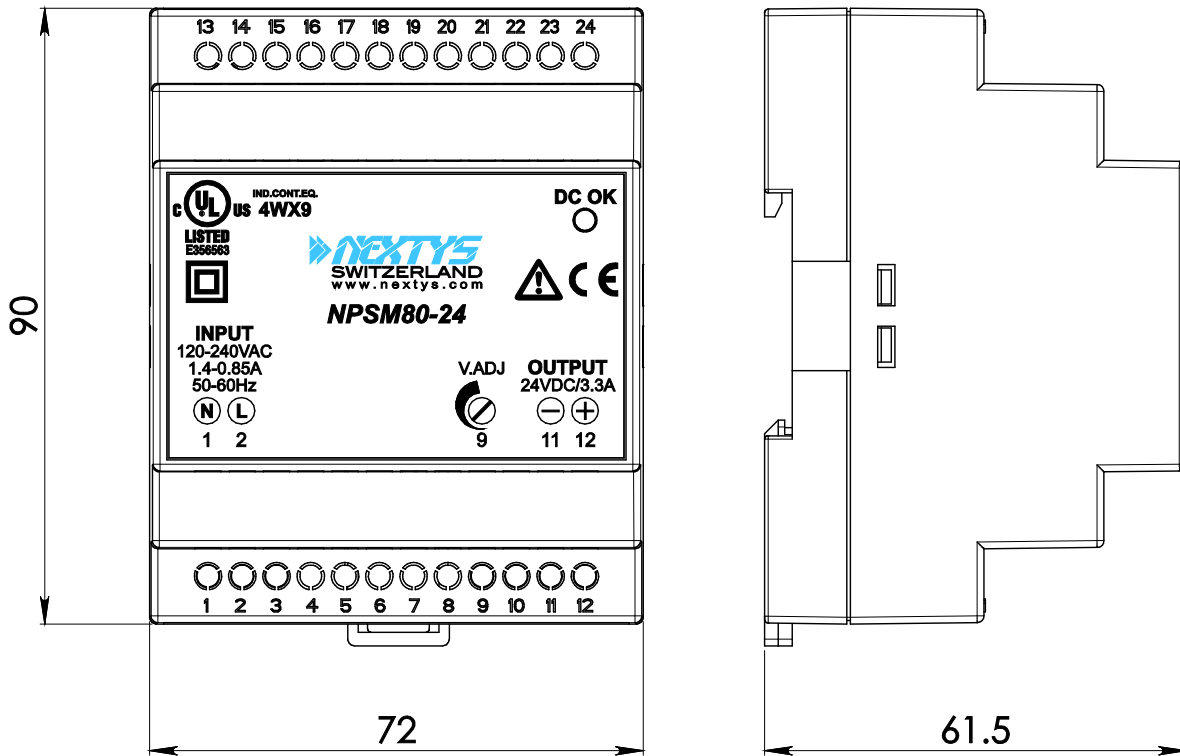

**CONNECTION**

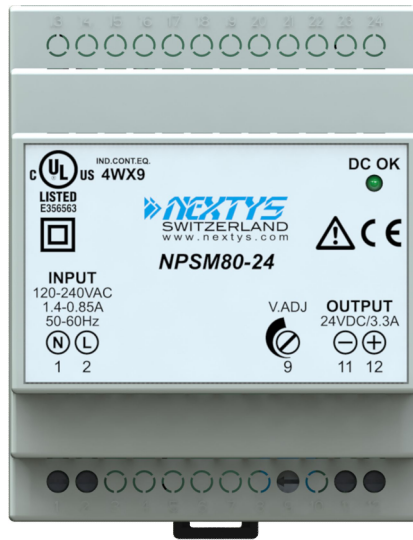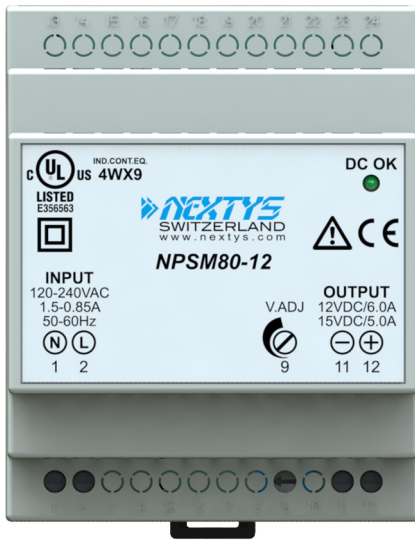

**Input Connection:**

- Single phase:
- L = Line (2)
  - N = Neutral (1)

**DC:**

- L = + Positive DC (2)
- N = - Negative DC (1)

**Output Connection:**

- + = Positive DC (12)
- - = Negative DC (11)