


# COMPACT LED EVO N 42W 840 OPAL DALI I CLASS



## OFFICE LIGHTING

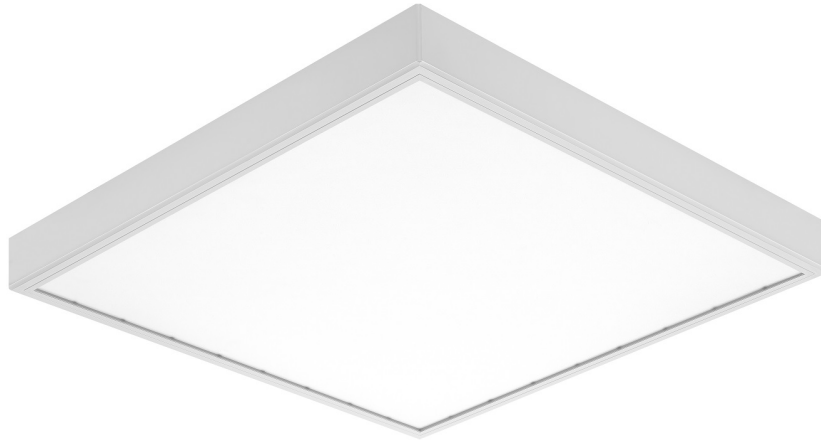

### CHARACTERISTIC

Index :	629402
Supply voltage :	220-240V
Frequency :	50 - 60Hz
Ingress protection IP :	IP20
Impact resistance IK :	IK07
Rated power :	42W
Energy efficiency class :	A+
Electrical protection class :	I
Colour temperature :	4000K
Luminous flux * :	4800lm

\* Initial, tolerance +/- 10%

### SPECIFICATION


Compact LED luminaire designed for surface installation. Equipped with energy-saving LED GO! panels and an evenly highlighted opal or prismatic diffuser, providing low glare. Made of plastic. Assembly or electrical connection does not require removing the diffuser.

### APPLICATION

This luminaire is designed for indoor use in offices or general utility rooms. It can be used as the main light source and it is particularly well-suited to be used as a light source for workplaces that require eyesight focus. The luminaire is used both in new applications, as well as it can replace traditional fluorescent luminaires with energy-saving LED solutions.

### LUMINOUS INTENSITY DISTRIB. CURVE

COMPACT LED EVO N 42W 840 OPAL DALI  
I CLASS

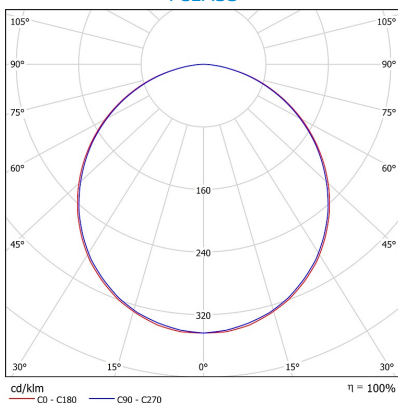

## COMPACT LED EVO N 42W 840 OPAL DALI I CLASS



## OFFICE LIGHTING

## TECHNICAL DATA

Index:	629402
Supply voltage:	220-240V
Frequency:	50 - 60Hz
Ingress protection IP:	IP20
Impact resistance IK:	IK07
Rated power:	42W
Luminous efficacy:	112lm/W
Energy efficiency class:	A+
Electrical protection class:	I
Dimensions:	620/620/66mm
Net weight of 1 unit:	2,8kg
Material of the body:	ABS
Colour temperature:	4000K
Mounting version:	Surface
Power supply:	DALI
Colour of the body:	White
Working temperature:	from -20°C to +35°C
Luminous flux*:	4800lm
Material of the diffuser:	PC
Type of the diffuser:	Opal
Replaceable light source:	No
Power supply included:	Yes
Compatibility with dimmers:	Yes
For outdoor use:	No
Colour rendering:	Ra>80
Light source:	LED GO!
Disconnectable wire:	Yes
Nominal lamp lifespan:	50000h L70B50

\* Initial, tolerance +/- 10%

The company reserves the right to make design changes or upgrades in the presented product.  
Product data sheet does not constitute an offer.

Revision date: 2017-10-30



Lena Lighting S.A.  
ul. Kornicka 52  
63-000 Sroda Wielkopolska

tel. +48 (61) 28 60 300  
fax.+48 (61) 28 54 059  
e-mail: office@lenalighting.pl  
www.lenalighting.pl



The luminaire complies with the EU ROHS Directive 2011/65/UE.



This product is a subject to electric and electronic waste equipment regulations (WEEE).



18/2017