

Mini Combination / EvoSIGNAL

Mini TwinFLASH Combi 115-230VAC RD



| | |
|-----------|----------------|
| Part No.: | 460.120.60 |
| Series: | EvoSIGNAL Mini |



| MECHANICAL DATA | |
|------------------------------|-----------------------------|
| Height | 85 mm |
| Diameter | 62 mm |
| Materials | PC PC/ABS |
| Dome colour | Red |
| Housing colour | Gray |
| Protection category | IP66 |
| Connection | Push-in terminal |
| cross-sectional area minimum | 0,25mm ² / 24AWG |
| cross-sectional area maximum | 1,50mm ² / 16AWG |
| Type of fixing | Wall mounting |
| Service life optical | 50,000 h minimum |
| Acoustic service life | 5,000 h minimum |
| Working temperature minimum | -30°C |
| Working temperature maximum | +60°C |
| Weight with packaging | 100 g |
| Product weight | 78 g |

| ELECTRICAL DATA | |
|-----------------------------|--------------------------|
| Operating voltage | 115-230V |
| Operating voltage type | AC |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 230 VAC |
| Rated operational current | 75 mA |
| Protection class | Protection class 2 |
| Pollution degree | 3 |
| Overtoltage category | II |
| Isolation voltage | Ui = 250V; Uimp = 2.500V |

| OPTICAL DATA | |
|----------------------|---------------------------|
| Light source | LED |
| Light colour | Red |
| Optical signal image | EVS Flash TwinFlash |
| Flash frequency | 1 Hz |


| ACUSTICAL DATA | |
|-------------------------------|-------------------------------|
| Volume/dB(max) at 1m distance | 95 dB(A) |
| Acoustic signal image | Continuous tone Pulse tone |
| Number of tones | 2 tone |

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Mini Combination / EvoSIGNAL

Mini TwinFLASH Combi 115-230VAC RD

DRAWING

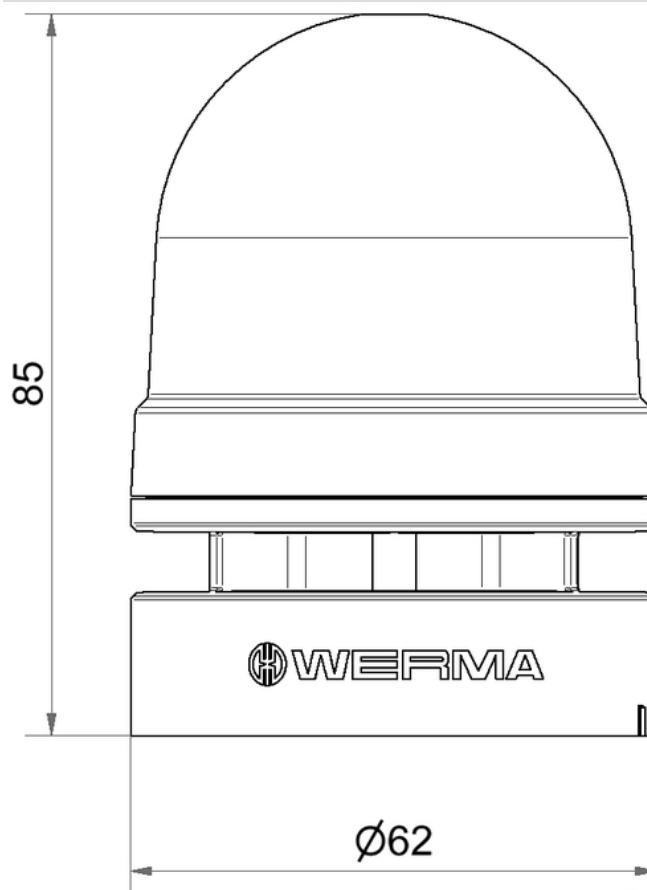

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.