

TAURUS N7201

Ideal for illuminating short distances, the Taurus is used primarily in engine rooms. A white plastic cover ensures that those working in its beam will not be blinded. The light pattern is designed to minimize shadows. The Taurus has no less than 54 LEDs and an output of 1950 lumens.



Not all products are available in all markets. During continuous improvement specifications and design are changing. All values are nominal values. Illustrations do not necessarily show the design of every version and some features are version specific. The lumens output varies depending on lens colour.

TECHNICAL DATA

Theoretical Lumens Output	3100 lm	Vibration	15.3Grms 24-2000Hz
Operational Lumens Output	1950 lm	Lens	PC
Colour Temperature	5700 K	Body / Housing	Aluminium
Nominal Voltage DC	12 - 24 V	Weight	1.3 kg
Input Voltage DC	9 - 32 V	IP Rating	IP68, IPK6K9K, SAE J1455
Power Consumption	30 W	Salt Spray Test	ISO 9227 240H
Nominal Current at	24V=1.25A, 12V=2.5A	EMC	CISPR 25 Class 3, ISO 13766, ISO 14982, ISO 7637-2
Connector	Built-in Deutsch DT-2 (2-pin)	Operating Temperatures	-40°C... +85°C (Overheat protected)
Mount	Single Bolt M10	Part number	Right: 987-001B, Left: 987-004B
Shock	60G		

CONNECTORS




Built-in Deutsch DT-2 (2-pin)

KEY FEATURES

- Especially for engine rooms
- Operational lumens output: 1950lm
- Designed to minimize shadows

LIGHT PATTERNS

N7201 1950lm
Diffused

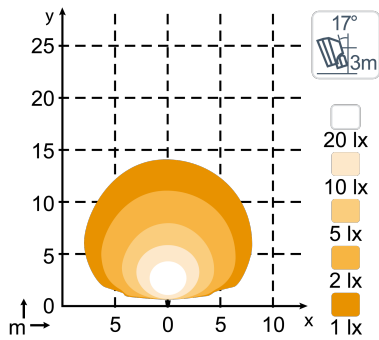

DRAWINGS

