

Signal tower / Pre-assembled Signal Tower  
**CO2 Traffic Light**



<b>Part No.:</b>	<b>649.000.10</b>
<b>Series:</b>	<b>KombiSIGN 72</b>



MECHANICAL DATA	
Height	287 mm
Diameter	70 mm
Materials	PA PC PC/ABS
Dome colour	Green Red Yellow
Housing colour	Black
Protection category	IP20
Connection	Plug-in connection
Cable length	1500 mm
Tension relief	Not present
Type of fixing	Base mounting
Working temperature minimum	+10°C
Working temperature maximum	+35°C
Weight with packaging	856 g
Product weight	591 g


ELECTRICAL DATA	
Operating voltage	230V
Operating voltage type	AC
Operating voltage frequency	50Hz
Operating voltage tolerance	+/- 20%
Rated operational voltage	230 VAC
Rated operational current	40 mA
Protection class	Protection class 2
Pollution degree	2
Isolation voltage	Ui = 250V; Uimp = 2.500V

OPTICAL DATA	
Light source	LED
Light colour	Green Red Yellow
Optical signal image	Blink Permanent
Service life optical	50,000 h maximum

**!** For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Signal tower / Pre-assembled Signal Tower  
**CO2 Traffic Light**

DRAWING

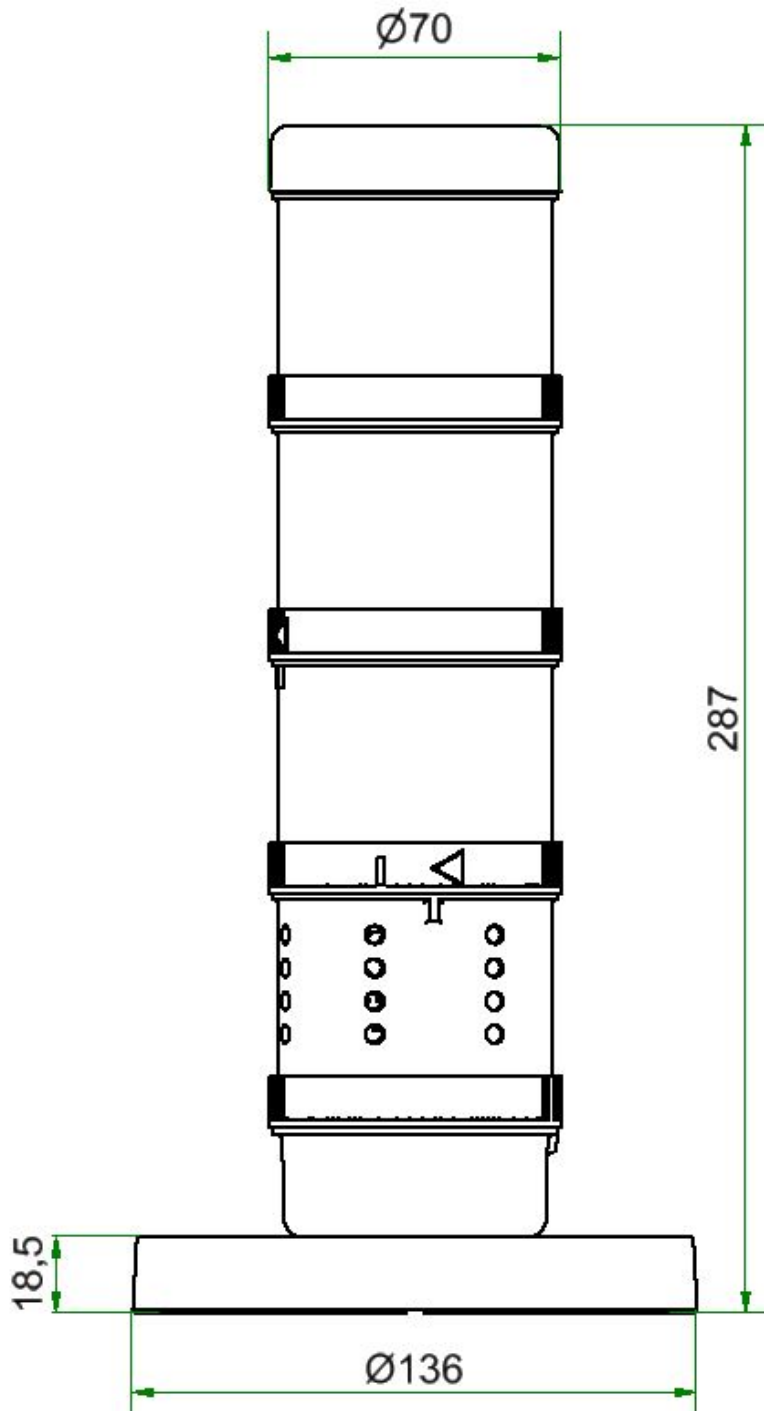

! For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

## Signal tower / Pre-assembled Signal Tower CO2 Traffic Light

### GENERAL

Messbereich / measurement range: 400 PPM – 3000 PPM

>3000 PPM = RED BLINKING

>2000 PPM = RED

>1000 – 2000 PPM = YELLOW

≤1000 PPM = GREEN



For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.