

## Maxi free-standing Beacons / Revolving Signal Light 884

## Rotating Beacon Fresnel 24VAC/DC GN



Part No.: 884.230.75


**MECHANICAL DATA**

|                              |                             |
|------------------------------|-----------------------------|
| Height                       | 218 mm                      |
| Diameter                     | 142 mm                      |
| Materials                    | PC<br>PC/ABS                |
| Dome colour                  | Green                       |
| Housing colour               | Black                       |
| Protection category          | IP65                        |
| Connection                   | Screw terminals             |
| cross-sectional area maximum | 1,50mm <sup>2</sup> / 16AWG |
| Cable entry                  | Rubber pinch                |
| Cable entry minimum          | d = 5 mm                    |
| Cable entry maximum          | d = 7 mm                    |
| Tension relief               | Pull-out protection         |
| Type of fixing               | Base mounting               |
| Working temperature minimum  | -30°C                       |
| Working temperature maximum  | +50°C                       |
| Weight with packaging        | 761 g                       |
| Product weight               | 672 g                       |

**ELECTRICAL DATA**

|                             |                    |
|-----------------------------|--------------------|
| Operating voltage           | 24V                |
| Operating voltage type      | AC/DC              |
| Operating voltage frequency | 50Hz               |
| Operating voltage tolerance | +/- 10%            |
| Rated operational voltage   | 24 VDC             |
| Rated operational current   | 250 mA             |
| Rated inrush current        | 2600 mA            |
| Protection class            | Protection class 2 |
| Pollution degree            | 3                  |
| Overvoltage category        | II                 |

**OPTICAL DATA**

|                      |                  |
|----------------------|------------------|
| Light source         | LED              |
| Light colour         | Green            |
| Optical signal image | Revolving        |
| Service life optical | 50,000 h minimum |
| Rotation speed (rpm) | 60 U/min         |

**APPROVAL DATA**


For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Maxi free-standing Beacons / Revolving Signal Light 884

## Rotating Beacon Fresnel 24VAC/DC GN

|                               |     |
|-------------------------------|-----|
| Conforms with CE              | Yes |
| WEEE                          | Yes |
| Conforms with RED directive   | No  |
| Conform with ATEX-directive   | No  |
| Conforms with CCC-Ex          | No  |
| Conforms with CCC             | No  |
| Conforms with UL              | No  |
| Conforms with FCC             | No  |
| Conforms with IC              | No  |
| EAC certificate available     | Yes |
| Conforms with UKCA (Importer) | No  |
| Conforms with CMIM            | No  |
| Conforms with AS-I            | No  |
| Conforms with GL              | No  |
| Conforms with RoHS CN         | No  |
| Conforms with VdS             | No  |




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Maxi free-standing Beacons / Revolving Signal Light 884

# **Rotating Beacon Fresnel 24VAC/DC GN**

## **DRAWING**

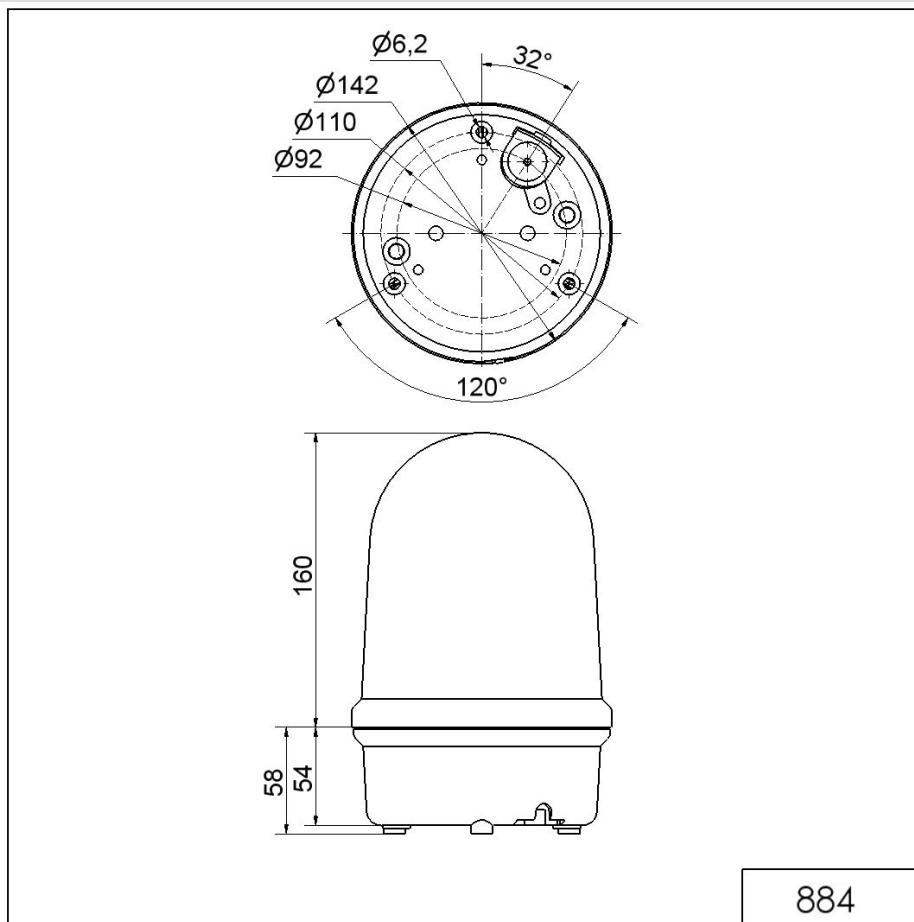

 For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.