

Midi Combination / EvoSIGNAL

## Midi TwinFLASH Combi 115-230VAC GN



Part No.:	461.220.60
Series:	EvoSIGNAL Midi



MECHANICAL DATA	
Height	130 mm
Diameter	85 mm
Materials	PC PC/ABS
Dome colour	Green
Housing colour	Gray
Protection category	IP66
Connection	Push-in terminal
cross-sectional area minimum	0,25mm <sup>2</sup> / 24AWG
cross-sectional area maximum	1,50mm <sup>2</sup> / 16AWG
Service life optical	50,000 h minimum
Acoustic service life	5,000 h minimum
Working temperature minimum	-30°C
Working temperature maximum	+60°C
Weight with packaging	286 g
Product weight	186 g

ELECTRICAL DATA	
Operating voltage	115-230V
Operating voltage type	AC
Operating voltage tolerance	+/- 10%
Rated operational voltage	230 VAC
Rated operational current	215 mA
Protection class	Protection class 2
Pollution degree	3
Overvoltage category	II
Isolation voltage	Ui = 250V; Uimp = 2.500V

OPTICAL DATA	
Light source	LED
Light colour	Green
Optical signal image	EVS Flash TwinFlash
Flash frequency	1 Hz


ACUSTICAL DATA	
Volume/dB(max) at 1m distance	110 dB(A)
Acoustic signal image	Multi-tone
Number of tones	10 tone
Audio frequency	3300 Hz

! For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Midi Combination / EvoSIGNAL

**Midi TwinFLASH Combi 115-230VAC GN**

**DRAWING**

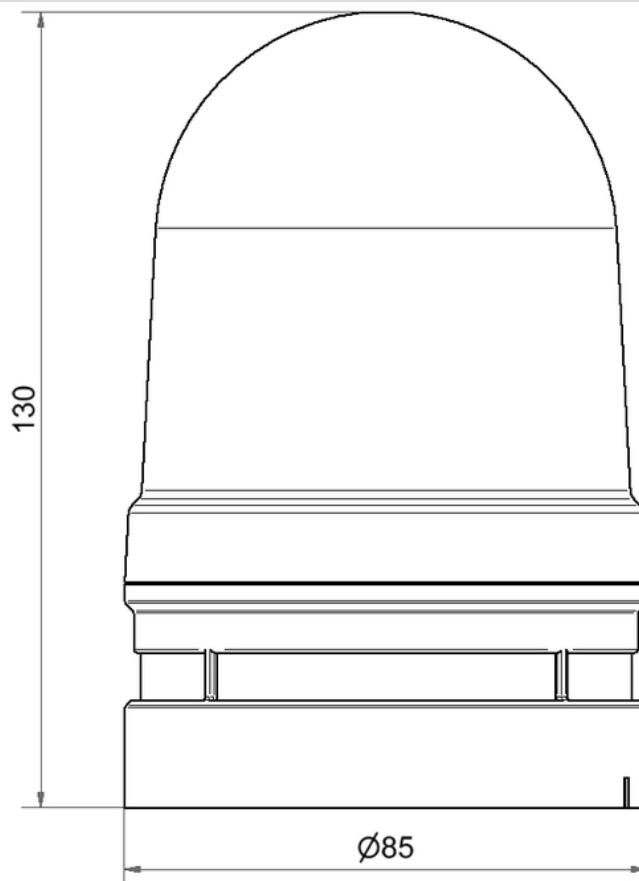

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.