
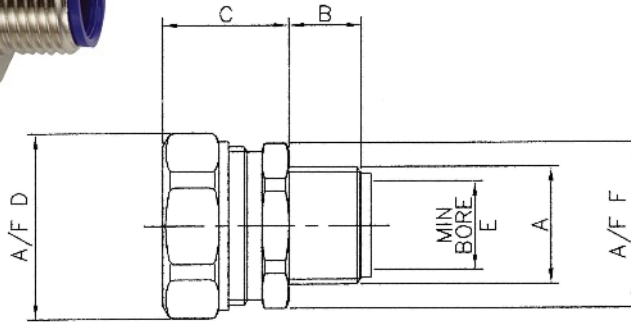


<b>Technical Data Sheet</b>	<b>DS500/1214</b>
<b>Product Description</b>	<b>Straight, external thread, nickel plated brass, LTP / LTPHC / LTPUL / LTPSS / LTPPU / LTBRDP / LTDBRDLFH conduit fitting.</b>
<b>Product Range</b>	<b>LTP - C Type fitting (Metric Threads)</b>

# FLEXICON

FLEXIBLE CONDUIT SOLUTIONS

Roman Way, Coleshill  
Birmingham, B46 1HG  
(t) +44 (0)1675 466900  
(w) www.flexicon.uk.com  
(e) sales@flexicon.uk.com

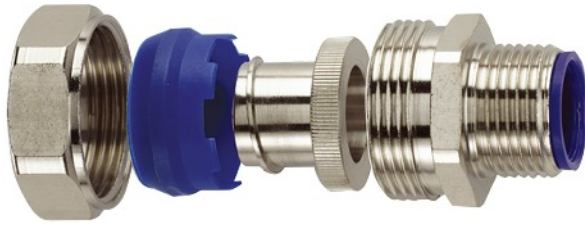

### Material

Nickel Plated Brass

### Colour

Self Colour

### Fire Performance

Low Fire Hazard  
- Halogen, Sulphur & Phosphorus Free



### IP Rating



### Applications

Suitable for knockouts or threaded entries. Nickel plated brass compression fitting comprising of body, nut, earthing ferrule, nylon compression seal and insulating throat. The earthing ferrule is manufactured in machined nickel plated brass to facilitate easy assembly and re-use. Also ensures high mechanical strength and electrical continuity.

### Features

- Supplied with insulating throat
- High tensile strength
- Oil resistant
- Corrosion resistant
- Interchangeable with all Liquidtight conduits made to American (UL360) sizes
- Conforms to EN 61386

### Temperature Performance

-50°C to +135°C

Conduit Size	Part No.	Metric Thread	Dimension (mm)				
			A	B	C	D	E
10	LTP10-M12-C	M12 X 1.5	10.0	16.4	20.0	5.6	20.0
10	LTP10-M16-C	M16 X 1.5	10.0	19.8	20.0	5.6	20.0
12	LTP12-M16-C	M16 X 1.5	10.0	19.8	24.0	8.6	22.0
16	LTP16-M16-C	M16 X 1.5	12.0	21.0	26.0	10.7	24.0
16	LTP16-M20-C	M20 X 1.5	12.0	21.0	26.0	10.7	24.0
20	LTP20-M20-C	M20 X 1.5	12.0	21.5	29.0	14.5	26.0
25	LTP25-M25-C	M25 X 1.5	14.0	26.5	35.0	18.0	33.0
32	LTP32-M32-C	M32 X 1.5	15.0	30.8	42.0	24.6	40.0
40	LTP40-M40-C	M40 X 1.5	16.0	31.5	52.0	32.7	50.0
50	LTP50-M50-C	M50 X 1.5	18.0	35.0	58.0	37.7	58.0
63	LTP63-M63-C	M63 X 1.5	20.0	38.8	70.0	49.0	70.0

### Compliance, Approvals & Accreditation



EN 61386 Classification Available on request

Vibration and Shock resistant to EN 61373 Cat 2

### Typical Applications



Errors, omissions and amendments excepted. As part of continuing product development Flexicon Ltd reserve the right to alter product specifications without prior notice. Data given is correct at time of compilation. Product specification and application data is for guidance only and does not constitute a warranty of any kind, either expressed or implied for Flexicon products or their suitability for a specific purpose. Third party approvals maybe limited to certain sizes within a product range.